## Colamark













## Colamark RW420 Label Rewinder

- ► Colamark RW420 is a professional label rewinding device that could ensure the data precision during the process of the labels reclaiming. It enhances the working efficiency by minimizing different resources such as labor cost, material cost, time and...etc.
- RW420 makes the work simple and convenient, more accurate in the aspect of calculating label stock and forward purchases.
- ▶ Backed by an engineering design team with years of experiences in automatic labeling system equipment, Colamark RW420 offers the advantage of stability, as well as the flexibility to add custom engineering functions according to the customer's requirement.





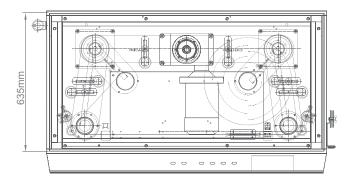

## **Features**

- The whole roll of labels are counted automatically through the special electric sensors design, easy operation, and accord with the medicine GMP standard which in the aspect of calculating labels' stock quantity after the labeling process. Gives help in managing the surplus labels effectively.
- Pneumatic spindle brings along the label roll,
  making the slitting process more accurate and smoothly.
- User friendly speed control switch ensures the whole process of label slitting & rewinding, and label calculating under proper control.
- Operator is able to check the label quality with reference to the work instruction guide during the rewinding process and improves the passing rate.
   It enables to put multi-rolls label connecting into one single roll, and makes the label warehouse management easier.
- Enable to add the information of logo, mfg date,

serial numbers and batch code after equipped with inkjet printing system or other printers as options.

• With vision inspection system, examining each barcode and message printed on the label becomes possible. (Optional)

| Machine Model                | RW420                             |
|------------------------------|-----------------------------------|
| Max label roll diameter      | 400mm                             |
| Max label height             | 200mm                             |
| Label core internal diameter | 76mm                              |
| Rewinding speed              | 6–65m/min                         |
| Size(L×W×H)                  | (L)1,260mm × (W)620mm × (H)1350mm |
| Power consumption            | 220VAC 50/60Hz 0.75kW             |

For continuous improvement on design and product innovations, all specification data are subject to change without prior notice

## Colamark (Guangzhou) Labeling Equipment Limited

19 Jin Xiu Road, Economics Trade Development District, Guangzhou, China 510730 Tel: +86 20 8221 6718 Fax: +86 20 8221 5799

Colamark Asia Ltd 820 Topsail Plaza, 11 On Sum Street, Shatin, Hong Kong Tel: +852 2634 8011 Fax: +852 8161 3311 info@colamark.com www.colamark.com

| HongKong | Guangzhou | Kunming Chengdu | Wuhan | Chongqing | Xian | Shanghai | Qingdao | Beijing | Shenyang | Harbin